


*"tough tech for tough environments"*  
**PA-R-340-7 servo-actuator**



**PA-R-340-7-X-X-24-X-XXX-7X**

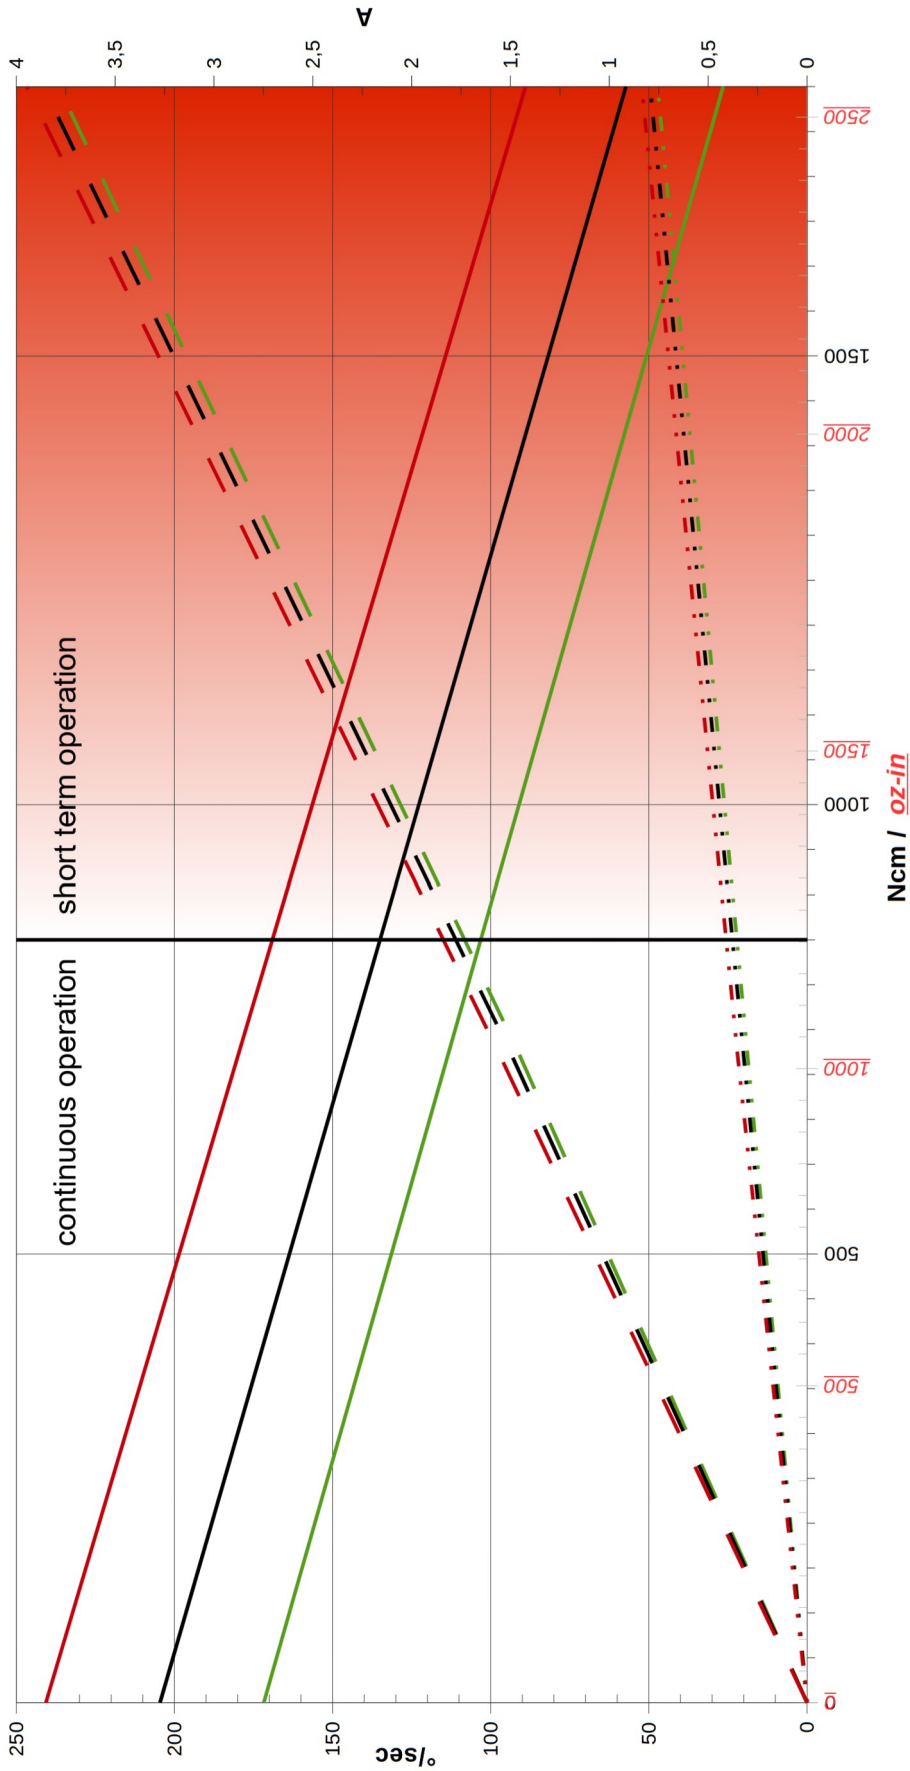

- Speed to load @28V
- Speed to load @24V
- Speed to load @20V
- - - current at load (dynamic) @28V
- - - current at load (dynamic) @24V
- - - current at load (dynamic) @20V
- · · current at load (static) @28V
- · · current at load (static) @24V
- · · current at load (static) @20V

! The overLoad protection limits the performance of the actuator during overload conditions. !